




Fuente de alimentación de tensión constante. Funciona desde 90 ~ 305VAC. Consigue una alta eficiencia sin ventilador, hasta un 92,5% gracias a un diseño optimizado y es capaz de funcionar desde -40°C ~ +90°C.


Constant coltage power supply. Operates from 90 ~ 305VAC. It achieves high efficiency without fan, up to 92.5% to an optimized design and is capable of operating from -40°C ~ +90°C.

- 5
Warranty
Years
- 12-24 V
DC
- IP20
-


• Medidas / Dimensions

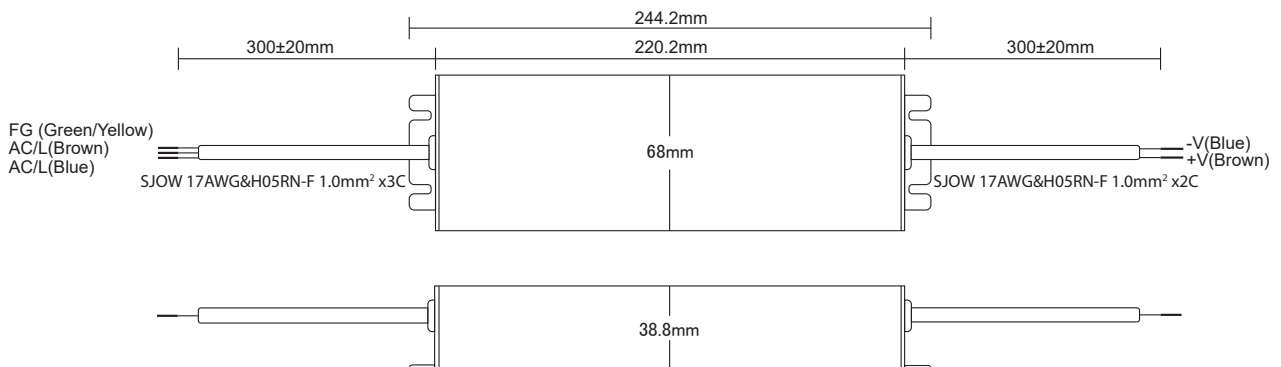

• Carga de salida vs temperatura / Output load vs temperature

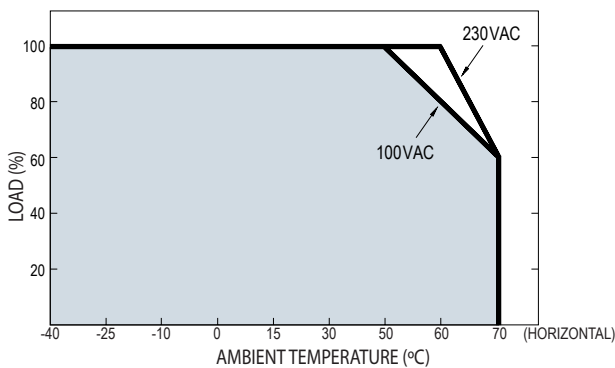

• Características estáticas / Static characteristics

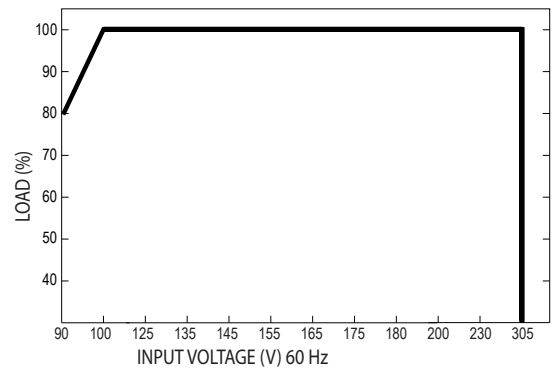

• Características / Characteristics

MODEL	FC240-12	FC240-24	
OUTPUT	DC VOLTAGE	12V	24V
	CONSTANT CURRENT (4)	6 ~ 12V	12 ~ 24V
	RATED CURRENT	16A	10A
	RATED POWER	192W	240W
	RIPPLE & NOISE (max.) (2)	150mVp-p	
	VOLTAGE TOLERANCE (3)	±2.5%	±1.0%
	LINE REGULATION	±0.5%	
	LOAD REGULATION	±2.0%	±0.5%
	SETUP, RISE TIME (6)	1000ms, 80ms/115VAC	500ms, 80ms/230VAC
	HOLD UP TIME	15ms / 115VAC, 230VAC	
INPUT	VOLTAGE RANGE (5)	90 ~ 305VAC	127 ~ 431VDC
	FREQUENCY RANGE	47 ~ 63Hz	
	POWER FACTOR	PF≥0.98/115VAC, PF≥0.95/230VAC @ full load	
	TOTALLY HARMONIC DISTORTION	THD< 20% (@ load≥50% / 115VAC,230VAC; @ load≥75% / 277VAC)	
	EFFICIENCY	90%	92.5%
	AC CURRENT	4A / 115VAC	2A / 230VAC 1.2A / 277VAC
	INRUSH CURRENT	COLD START 75A(twidth=570µs measured at 50% Ipeak) at 230VAC; Per NEMA 410	
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	2 units (circuit breaker of type B) / 4 units (circuit breaker of type C) at 230VAC	
	LEAKAGE CURRENT	<0.75mA / 277VCA	
	PROTECTION	OVER CURRENT	95 ~ 108%
SHORT CIRCUIT		Constant current limiting, recovers automatically after fault condition is removed	
OVER VOLTAGE		13.5 ~ 18V	27 ~ 34V
OVER TEMPERATURE		Shut down and latch off o/p voltage, re-power on to recover	
		Shut down o/p voltage, recovers automatically after temperature goes down	
ENVIRONMENT	WORKING TEMP.	Tcase= -40 ~ +90°C	
	MAX. CASE TEMP.	Tcase= +90°C	
	WORKING HUMIDITY	20 ~ 95% RH non-condensing	
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH	
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)	
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes	
SAFETY & EMC	SAFETY STANDARDS	UL1012, CAN/CSA-C22.2 No. 107.1-01, UL8750(type"HL"), CSA C22.2 No. 250.0-08; EN/AS/NZS 61347-1, EN/AS/NZS 61347-2-13 independent; UL60950-1, UL8750, TUV EN60950-1; GB19510.1, GB19510.14; IP65 or IP67; J61347-1, J61347-2-13, EAC TP TC 004, KC61347-1, KC61347-2-13 approved	
	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC I/P-FG: 2KVAC O/P-FG: 1.5KVAC	
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG: 100M Ohms /500VDC / 25°C / 70% RH	
	EMC EMISSION	Compliance to EN55015, EN55032 (CISPR32) Class B, EN61000-3-2 Class C (@ load ≥ 50%) ; EN61000-3-3, GB17743 and GB17625.1, EAC TP TC 020	
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge immunity Line-Earth 4KV, Line-Line 2KV) EAC TP TC 020	

MODEL	FC240-12	FC240-24
MTBF	729.2K hrs min. Telcordia SR-332 (Bellcore); 207.9K hrs min.	MIL-HDBK-217F (25°C)
OTHERS	DIMENSION 244.2*68*38.8mm	
	PACKING 1.3Kg; 12pcs/16.6Kg/0.84CUFT	

NOTE

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
3. Tolerance: includes set up tolerance, line regulation and load regulation.
4. Please refer to "DRIVING METHODS OF LED MODULE"
5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" section details.
6. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time.
7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
8. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains.
9. This series meets the typical life expectancy of >62,000 hours of operation when Tcase, particularly (Tc) point (or TMP, per DLC), is about 75°C or less.
10. The ambient temperature derating of 3.5°C/100m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).

